

2DPC

2"DC BRUSHLESS SOLAR PUMP WITH PLASTIC IMPELLER



Copper outlet



Copper connecting fitting



Copper oil cylinder



Plastic Impeller



NSK Bearing




DC controller

TECHNICAL DATA

ITEM	Voltage	Optimum input voltage (DC)	Power	Max. Flow	Max. Head	Outlet	Cable	Solar panel	
								Open circuit voltage(VOC)	Power
2DPC1.5-35-24-200	24V	30V-48V	200W	1.5m ³ /h	35m	0.75"	2m	<60V	≥1.3*PUMP POWER
2DPC1.7-45-24-300	24V	30V-48V	300W	1.7m ³ /h	45m	0.75"	2m	<60V	≥1.3*PUMP POWER
2DPC1.7-64-48-400	48V	60V-90V	400W	1.7m ³ /h	64m	0.75"	2m	<110V	≥1.3*PUMP POWER

HYDRAULIC PERFORMANCE CURVES

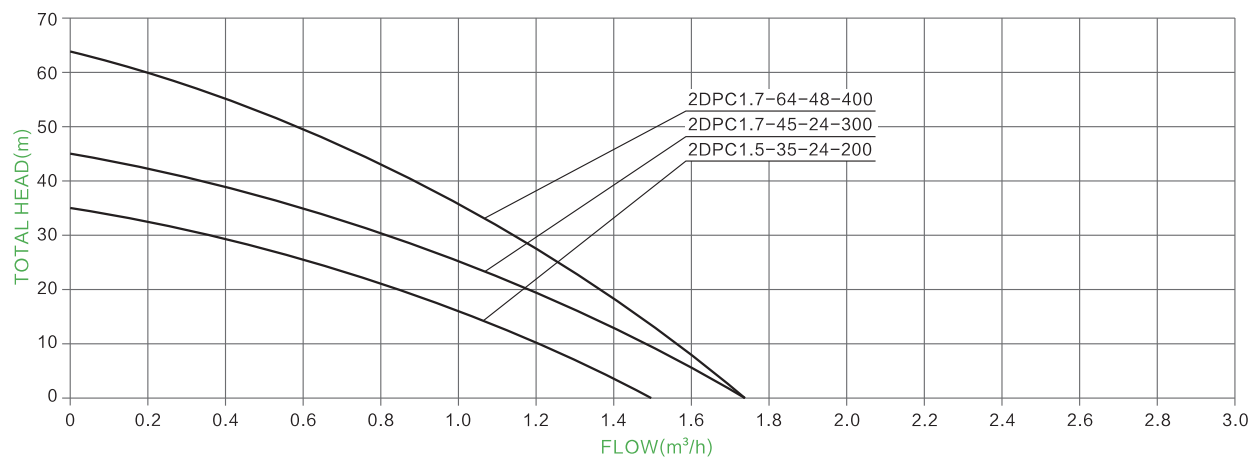

FREE SPARE PARTS

